



T-SHARK®

Battery strapping tool for polyester and polypropylene straps with vibration sealing

Models



	T-Shark GP	T-Shark HT	T-Shark HD
Operation mode	manual	automatic / manual / semi-automatic	automatic / manual / semi-automatic
Tension force:			
Standard	650 - 1,800 N =146 - 404 lbs	1,200 - 2,800 N = 240 - 630 lbs	2,200 - 4,200 N = 495 - 945 lbs
Soft	240 - 1,000 N = 54 - 225 lbs	500 - 1,500 N = 112 - 337 lbs	1,100 - 3,100 N = 245 - 695 lbs
Tension speed	14 m/min • 9"/sec	12 m/min • 8"/sec	9 m/min • 6"/sec
Strap	PP - PET 9 - 16 mm • 3/8" - 5/8"	PP - PET 10 - 16 mm • 7/16" - 5/8"	PP - PET 16 - 19 mm • 5/8" - 3/4"
Thickness	0.4 mm • 0.016" 0.85 mm • 0.033"	0.5 mm • 0.02" 1.1 mm • 0.043"	0.8 mm • 0.031" 1.27 mm • 0.05"
Battery	Akku Power Li-Ion 14.4 V, 3.0 Ah	Akku Power Li-Ion 14.4 V, 4.0 Ah	Akku Power Li-Ion 18 V, 5.0 Ah

Technical specifications

Dimensions	
Length	330 mm • 13"
Width	105 mm • 4.13"
Height	160 mm • 6.3"
Weight	3.7 - 4.0 kg • 8.15 - 8.8 lbs
Sealing	vibration sealing PP - PET

Polyester Strap (PET)



Polyester Strap (PET)



Polypropylene Strap (PP)



Accessories



- ✓ additional battery
- ✓ additional charger

Models



	T-Shark XTend
Operation mode	automatic / manual / semi-automatic
Tension force:	
Standard	2,500 N - 6,500 N = 560 - 1,465 lbs
Soft	1,800 N - 5,000 N = 450 - 1,125 lbs
Tension speed	5 m/min • 3"/sec
Strap	PET 25 - 32 mm • 1" - 1 1/4"
Thickness	0.9 mm • 0.035" 1.3 mm • 0.051"
Battery	Akku Power Li-Ion 36 V, 5.0 Ah

Technical specifications

Dimensions	
Length	425 mm • 16.73"
Width	135 mm • 5.31"
Height	180 mm • 7.09"
Weight	6.2 kg • 13.67 lbs
Sealing	vibration sealing PET

Polyester Strap (PET)




Polyester Strap (PET)



Accessories



- ✓ additional battery
- ✓ additional charger

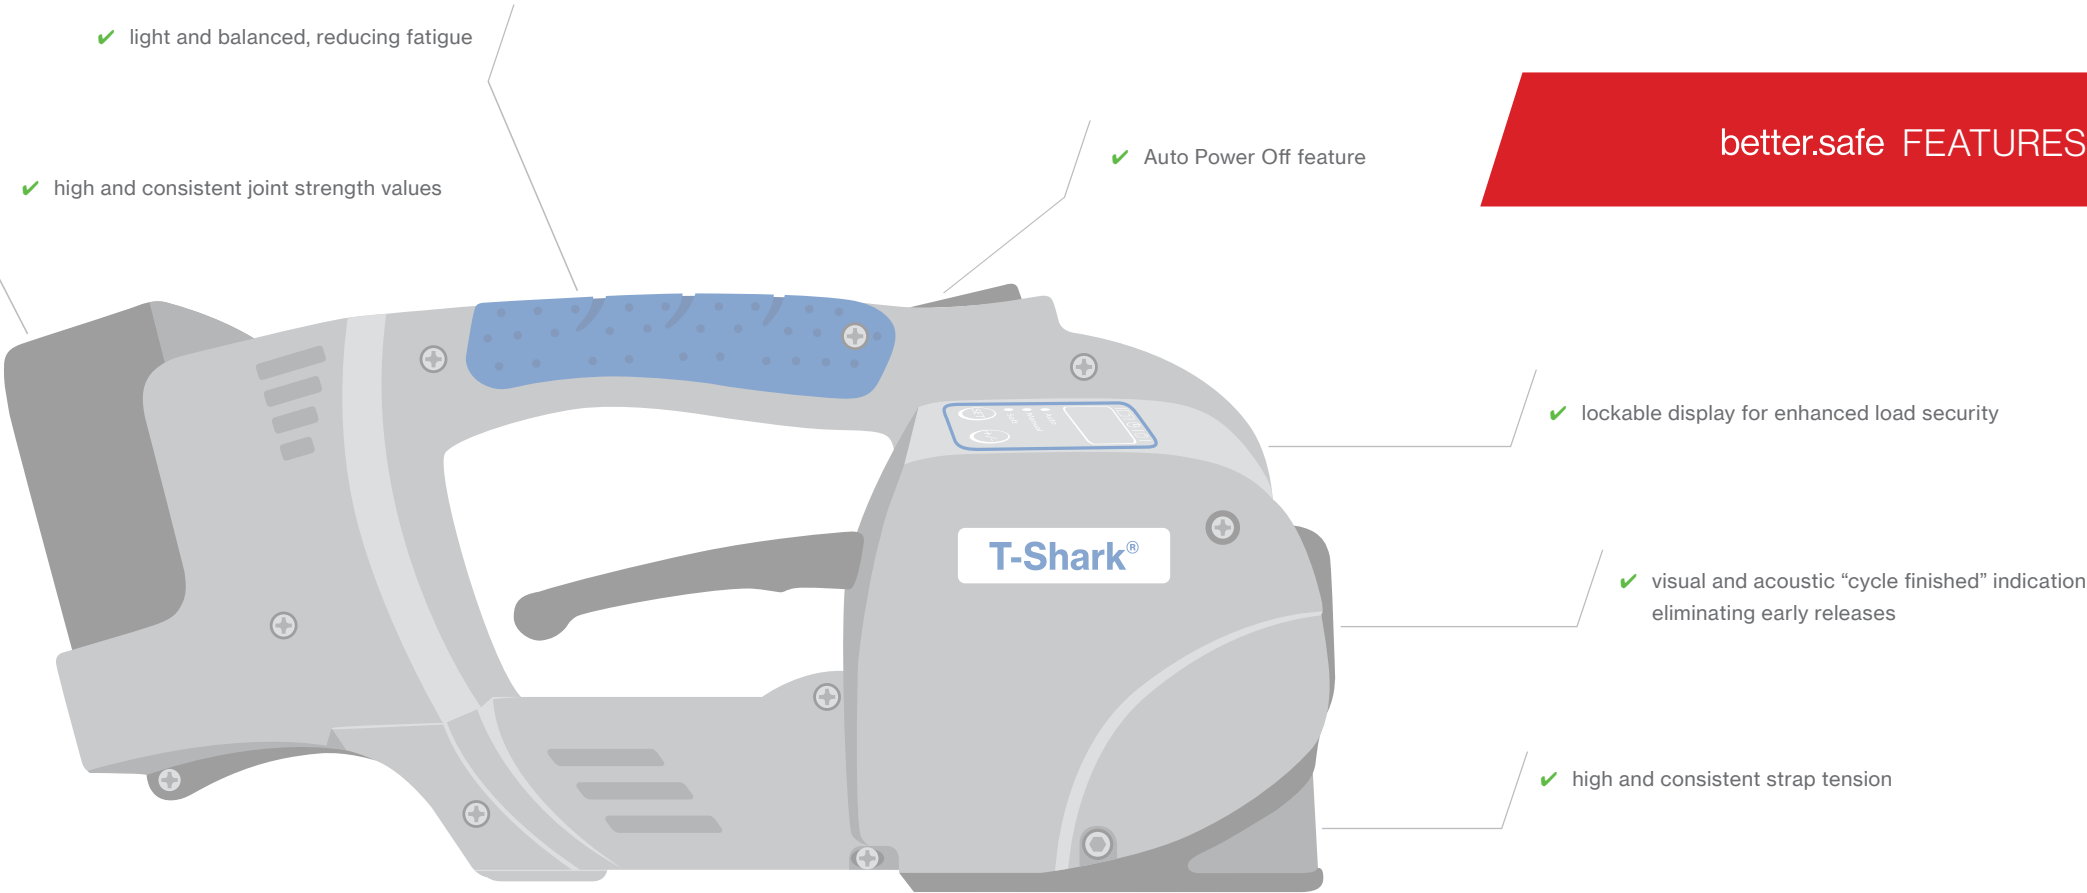

better.safe FEATURES



TEUFELBERGER Ges.m.b.H.

Vogelweiderstraße 50

4600 Wels, Austria

Phone: +43 (0) 7242 413-0

Fax: +43 (0) 7242 413-91-120

fibersplastics@teufelberger.com

www.teufelberger.com