


STAINLESS STEEL

OPEN SWAGED SOCKET  
X2CrNiMoN22-5-3

MAC



PRODUCT CODE	$N_{uk}^{(1)}$ (kN)	$N_{Rd}^{(2)}$ (kN)	$d_{max}$ (mm)	$\varnothing A$ (mm)	-H (mm)	C (mm)	E (mm)	DH (mm)	S (mm)	T (mm)
MAC 6	30	18	6	26	105	18	24	11	17	8
MAC 8	55	33	8	33	139	22	31	14	22	10
MAC 10	85	51	10	37	166	25	34	16	25	12
MAC 12	120	72	12	45	200	30	42	19	30	15
MAC 14	165	99	14	49	230	33	46	21	35	15
MAC 16	220	132	16	58	265	40	54	25	41	18
MAC 18	280	168	18	65	297	44	60	28	44	22
MAC 20	345	207	20	71	330	49	67	31	51	22
MAC 22	415	249	22	78	362	54	73	34	55	25
MAC 24	495	297	24	82	393	57	77	36	60	25
MAC 26	585	351	26	86	423	60	82	38	66	25
MAC 28	675	405	28	94	455	65	88	41	69	30
MAC 30	775	465	30	100	488	69	95	44	75	30
MAC 32	885	531	32	106	519	74	100	47	80	32
MAC 34	1000	600	34	114	554	79	108	50	84	35
MAC 36	1120	672	36	119	583	82	112	52	88	37
MAC 38	1250	750	38	125	614	86	118	54	91	40
MAC 40	1385	831	40	131	647	91	124	57	98	40
MAC 42	1530	918	42	136	676	94	129	59	102	42

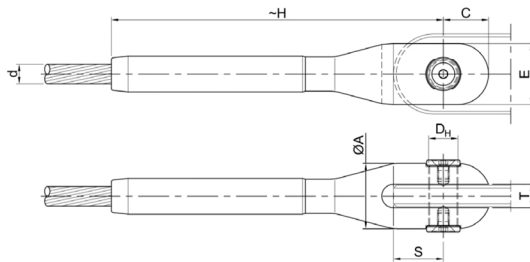

$d_{max}$  Max Strand Diameter

$N_{uk}$  Characteristic Breaking Strength

$N_{Rd}$  Design Resistance

(1) Characteristic Breaking Strength  $F_{uk} = N_{uk}$  (2) Design Resistance  $F_{Rd} = (F_{uk} / 1.5) / \gamma_R$   $F_{Rd} = N_{Rd}$   
For European Standard EN 1993-1-1:  $\gamma_R = 1.0$

Upon request, we can suggest the effective diameter and the breaking strength of the cable for the specific project.